

Fig. 1

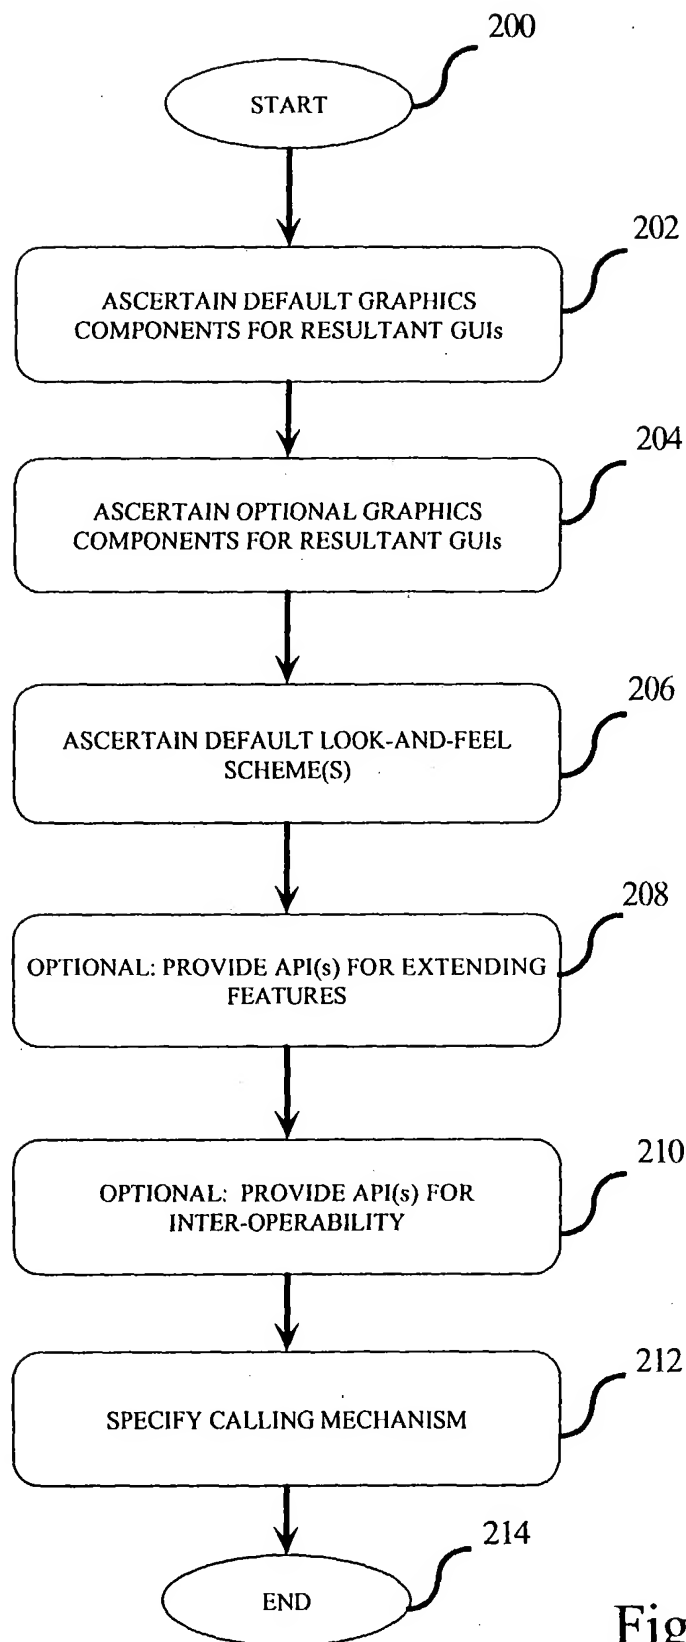


Fig. 2

Rhl-Table (string Title, table TableContentSource, int ButtonPosition, vector Button)

Fig. 3

Rhl-Table ("Employee Table", {{{"Employee ID", "Name", "Phone Number"} {"345678", "John  
Beamer", "408-123-4567"} {"345679", "Michael Miller", "408-123-4242"}}, 1, {"Add", "Delete",  
"Update", "Reset"})

Fig. 4.

Table Combo

### Employee Table

Employee ID	Name	Phone Number
345678	John Beamer	(408)123-4567
345679	Micheal Miller	(408)123-4242

Add Delete Update Reset

Fig. 5